US010231534B1

(12) **United States Patent**
Meador, III et al.

(10) **Patent No.: US 10,231,534 B1**
(45) **Date of Patent: Mar. 19, 2019**

(54) **BACK SUPPORT FRAME ATTACHMENT SYSTEM FOR A BACKPACK**

(71) Applicant: **MMI Outdoor, Inc.**, Montgomery, AL (US)

(72) Inventors: **William V. Meador, III**, Opelika, AL (US); **Ryan T. Torpey**, Montgomery, AL (US); **Jacob S. Pugh**, Montgomery, AL (US)

(73) Assignee: **MMI Outdoor, Inc.**, Montgomery, AL (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **15/670,565**

(22) Filed: **Aug. 7, 2017**

(51) **Int. Cl.**
A45F 3/08 (2006.01)
A45F 3/10 (2006.01)
A45F 3/04 (2006.01)

(52) **U.S. Cl.**
CPC ***A45F 3/08*** (2013.01); ***A45F 3/10*** (2013.01); *A45F 2003/045* (2013.01)

(58) **Field of Classification Search**
CPC A45F 3/08; A45F 3/10; A45F 2003/045
USPC 224/628, 630, 631
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,830,245 A * 5/1989 Arakaki A45F 3/04 2/2.5
5,131,576 A * 7/1992 Turnipseed A45F 3/08 224/262
5,320,262 A * 6/1994 Levis A45F 3/04 224/261
5,366,126 A * 11/1994 Dausien A45F 3/04 224/630
5,904,282 A * 5/1999 Gleason A45F 3/08 224/263
5,954,253 A * 9/1999 Swetish A45F 3/08 224/628
D468,792 S * 1/2003 Jacoway D21/801
6,892,915 B2 * 5/2005 Mares A45F 3/04 224/148.5
D507,697 S * 7/2005 Seong D3/216
7,028,873 B1 * 4/2006 Collier A45F 3/08 224/628
7,644,847 B2 * 1/2010 Howell A45F 3/08 224/628
7,694,862 B2 * 4/2010 Bergeron A45F 5/02 224/665

(Continued)

Primary Examiner — Nathan J Newhouse
Assistant Examiner — Lester L Vanterpool
(74) *Attorney, Agent, or Firm* — Bush Intellectual Property Law; Kenneth M. Bush

(57) **ABSTRACT**

A back support frame attachment system for a container, such as a backpack. A back support frame has a slot at its bottom end. A back portion of a container has a sleeve at its top end and a strap at its bottom end. The top end of the back support frame is insertable into the sleeve at the top end of the back portion and the strap is positionable through the slot in the bottom end of the back support frame. A first portion of the strap has hook material and a second portion of the strap has loop material, or vice versa. A folded middle portion of the strap is insertable through the slot at the bottom end of the back support frame such that the hook material can be attached to the loop material. The strap is operable to disconnect the bottom end of the back support frame from the bottom end of the back portion when a free end of the strap is pulled.
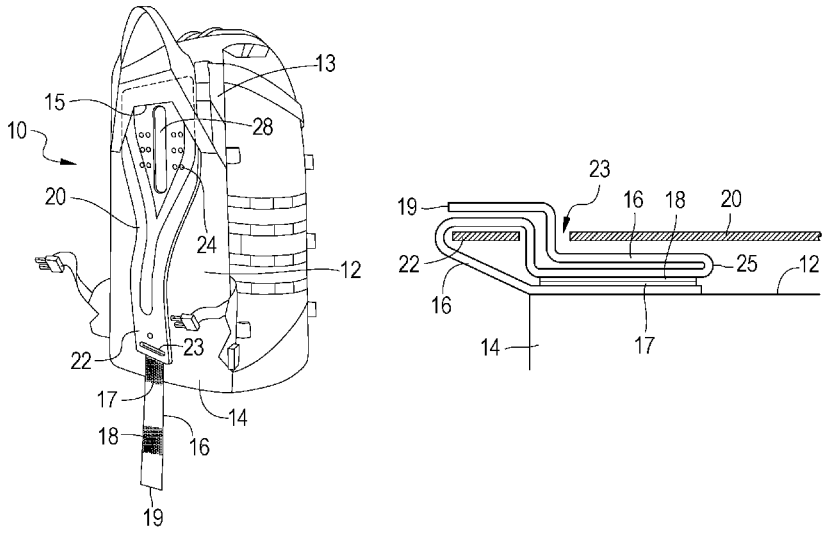
6 Claims, 3 Drawing Sheets